


包装机领军者
Leader Of Packaging Machine

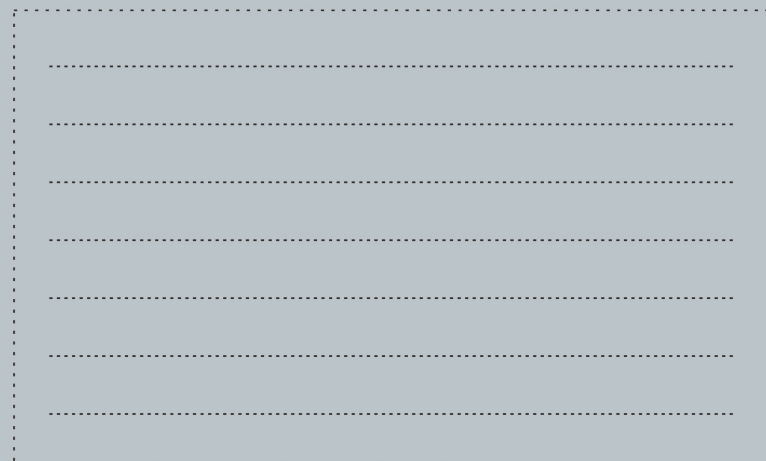

温州市华侨包装机械厂 WENZHOU HUAQIAO PACKING MACHINE FACTORY

温州工厂/Wenzhou Factory

地址：浙江省温州市空港新区港富路15号
ADD: NO.15 Gangfu Road, Konggang
New Area, Wenzhou, Zhejiang.
电话(TEL) : 0577-88633888 88631988
传真(FAX) : 0577-88628808

国际部/International Department

电话(TEL) : +86-577-88998813
传真(FAX) : +86-577-88996613
<http://www.huaqiaopm.com>
E-mail: huaqiaopm@huaqiaopm.com
<http://www.kunba.com>

上海工厂/Shanghai Factory

地址：上海市嘉定区黄渡镇春浓路732号
ADD: NO.732 Chunong Road, Huangdu
Town Jiading Area Shanghai
电话(TEL) : 021-69596266 69596268
传真(FAX) : 021-69596267

投诉邮箱/Complaint email

E-mail:
2725447904@qq.com



网站/website



扫描二维码关注账号
TikTok

2025.10

封口机系列
Continuous sealer series



温州工厂



上海工厂

捆霸 (KUNBA) 是温州市华侨包装机械厂的品牌, 专业从事包装机械设备和通用包装设备的制造和销售。我们自豪地向您介绍我们的品牌故事。参观公司, 洽谈业务以及获取更多相关信息。

品牌历史

自1985年成立并于1987年注册公司以来, 捆霸 (KUNBA) 已经有着40年的历史。在这段时间里, 我们专注于设计和制造高质量的包装机械设备, 包括真空机、连续封口机、封箱机、真空贴体和打码机。

品牌理念

我们的理念是: “选择捆霸, 选择放心。” 我们为国内外医疗、食品、日化、电器等各行业的客户提供卓越的产品、可靠的质量和出色的服务。这使我们赢得了来自一百多个国家和地区的一致好评, 使捆霸 (KUNBA) 成为行业内知名品牌。近年来, 捆霸 (KUNBA) 的产品已被近千家单位购买和使用, 遍布全球100多个国家和地区, 其中包括众多著名的世界500强公司。欧洲的同行还将我们指定为定制生产 (OEM) 的供应商。

质量认证

我们公司通过了ISO9001-2000国际质量管理体系、CE、TUV和SGS认证, 同时被授予“中国质量服务信誉AAA级”的荣誉。

公司愿景

捆霸 (KUNBA) 坚持以“做百年企业, 服务于世界”为愿景。公司拥有29000平方米的工厂和180多名员工, 以确保产品的研发、生产、装配、调试和交付各个环节都经过严格的质量控制。我们不断创新和改进产品设计, 以确保产品具有市场竞争力和满足客户需求。

量身定做服务

华侨包装还提供“量身定做”的服务, 根据客户的具体需求专门为客户定制特殊的机型。我们的产品正朝着系列化、全面化、节能化和人性化的方向发展。捆霸 (KUNBA) 将继续完善和发展, 为广大客户提供高质量和人性化的产品与服务, 因为我们专注于专业。我们热烈欢迎各位朋友前来参观公司, 洽谈业务以及获取更多相关信息。

KUNBA is a brand manufactured by Wenzhou Huqiao Packaging Machinery Factory, specializing in the production and sale of packaging machinery and general packaging equipment. We are proud to introduce our brand background to you.

Brand History:

Founded in 1985 and registered as a company in 1987, KUNBA has a 40-year history. During this time, we have focused on designing and manufacturing a range of high-quality packaging machinery and equipment, including vacuum machines, continuous sealing machines, carton sealing machines, vacuum labeling machines, and coding machines.

Brand Philosophy:

Our philosophy is, “Choose KUNBA, Choose assurance.” We serve numerous customers in the medical, food, daily chemical, electronics, and other industries both domestically and internationally. With outstanding products, reliable quality, and excellent service, we have received consistent praise from more than a hundred countries and regions, establishing KUNBA as a well-known brand in the industry. In recent years, KUNBA products have gained recognition from a wide customer base, and we have been designated as an OEM supplier by European peers.

Quality Certification:

Our company has obtained ISO9001-2000 international quality management system, CE, TUV, and SGS certifications, and has been awarded the title of “China Quality Service Credibility AAA.”

Company Vision:

KUNBA adheres to the vision of being a “century-old enterprise serving the world.” With a 29,000 square meter factory and over 180 employees, we rigorously control the quality of our products in every stage, from research and development to production, assembly, debugging, and delivery. Through continuous innovation and improvement in product design, we ensure the competitiveness and applicability of our products in the market.

Customization Services:

Huqiao Packaging also offers “tailor-made” services, creating special machine models according to the specific needs of customers. Our products are moving towards serialization, comprehensiveness, energy efficiency, and humanization. KUNBA will continue to provide high-quality and user-friendly products and services to customers worldwide because we are dedicated to professionalism. We warmly welcome friends from all walks of life to visit our company, engage in business discussions, and inquire about relevant information.

公司荣誉



- ◆ Devote to Packing Machine since 1987.
- ◆ 90000 square meters, 150 employees.
- ◆ Over 10 million dollars annual sales, 60% export to worldwide.
- ◆ well-equipped facilities and excellent quality control.
- ◆ SO9001:2008 CE certificate approved.
- ◆ OEM and customized -design service supplied.

坚持不懈 力求完美

CONSTANTLY STRIVE TO PERFECT
只有客户的成功、才有华侨的发展

WORKSHOP OVERVIEW

车间概览



PROCESSING EQUIPMENT

加工设备



MULTI-FUNCTIONAL BAND SEALER

多功能薄膜封口机

PATENT NUMBER: ZL02219651.X

中国专利号: ZL02219651.X

KUNBA牌系列薄膜封口机适用于各种塑料薄膜的封口与制袋, 广泛应用于食品、医药、化工、土特产品、电子元件等行业, 它是工厂、商店等部门使用的最佳封口设备

-Adjustable temperature and speed
-Emboss number and letter


-Work smoothly without wear-and-tear
-Durable heater and motor

-Cooling fan protect film from wrinkle

Continuous Sealer (Horizontal)

SMT-150W

卧式薄膜封口机

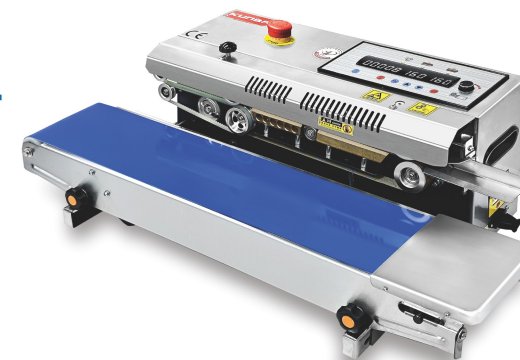

技术参数/Technology Parameters

型号/Model	SMT-150W	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-280°C
电机功率/Power Consumption	60W	输送总承载/Conveyor Loading	< 8kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	860x410x375mm
封口速度/Sealing Speeds	0-28m/min (米/分)	净重/毛重/N.W&G.W	22kg/25kg

Continuous Sealer (Vertical)

SMT-150LW

立式薄膜封口机




技术参数/Technology Parameters

型号/Model	SMT-150LW	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-280°C
电机功率/Power Consumption	60W	输送总承载/Conveyor Loading	< 8kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	860x410x375mm
封口速度/Sealing Speeds	0-28m/min (米/分)	净重/毛重/N.W&G.W	25kg/27kg

Continuous Sealer (Conveyor width 28CM)

SMT-150WK

卧式薄膜封口机
(加宽型28CM)

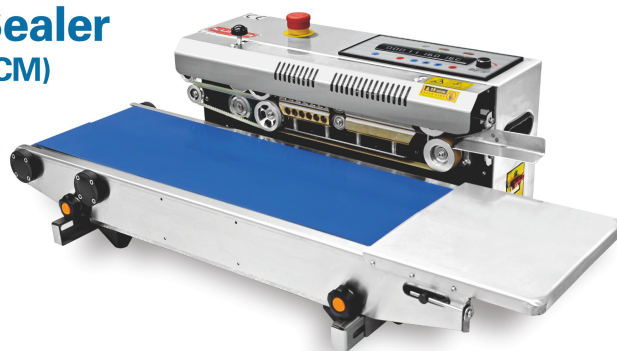

技术参数/Technology Parameters

型号/Model	SMT-150WK	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-280°C
电机功率/Power Consumption	60W	输送总承载/Conveyor Loading	<8kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	965x430x445mm
封口速度/Sealing Speeds	0-28m/min (米/分)	净重/毛重/N.W&G.W	29.5kg/32.5kg

Continuous Sealer Horizontal (protective type)

SMT-150WF


卧式薄膜封口机(防护型)




技术参数/Technology Parameters

型号/Model	SMT-150WF	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-280°C
电机功率/Power Consumption	60W	输送总承载/Conveyor Loading	<5kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	860x410x375mm
封口速度/Sealing Speeds	0-28m/min (米/分)	净重/毛重/N.W&G.W	22.5kg/25.5kg

150 Series Panel Operation Instructions 150 系列面板说明书

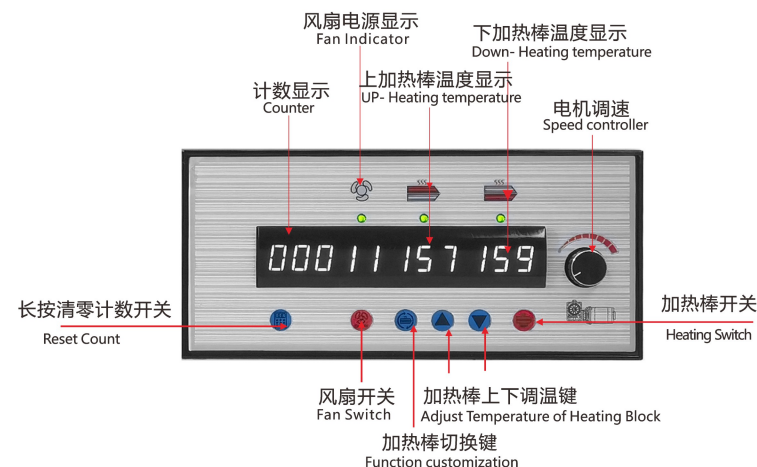

150系列可定制以下功能 Following function can be customized.

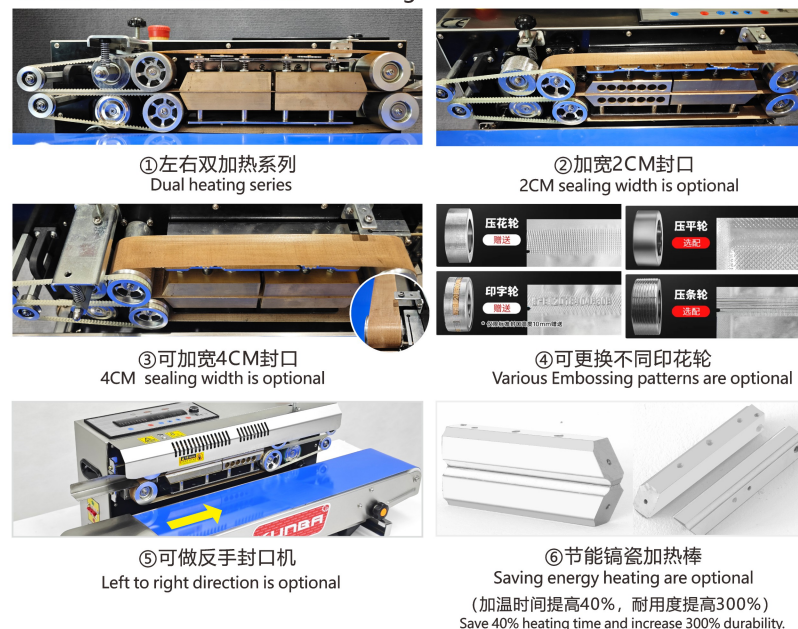

★SMT系列更适用市面上98%的薄膜袋。
SMT series sealer can be used in 98% of the bags on the market.

SOLID INK CONTINUOUS SEALER

墨轮印字薄膜封口机

PATENT NUMBER: ZL02219651.X

中国专利号: ZL02219651.X

-Adjustable printing position temperature and speed

-Cooling fan protect film from wrinkle

-Durable heater and motor

-Work smoothly without wear and tear

-Print 3 lines with ink

-Vertical and horizontal double-use

Continuous Sealer (Horizontal)

SMT-980W

卧式墨轮印字薄膜封口机



技术参数/Technology Parameters

型号/Model	SMT-980W	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-260°C
电机功率/Power Consumption	80W	输送总承载/Conveyor Loading	<10kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	965x430x365mm
封口速度/Sealing Speeds	0-28m/min (米/分)	净重/毛重/N.W&G.W	26kg/29kg

Continuous Sealer (Vertical)

SMT-980LW

立式墨轮印字薄膜封口机



技术参数/Technology Parameters

型号/Model	SMT-980LW	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-260°C
电机功率/Power Consumption	80W	输送总承载/Conveyor Loading	<10kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	965x430x365mm
封口速度/Sealing Speeds	0-28m/min (米/分)	净重/毛重/N.W&G.W	29kg/32kg

Continuous Sealer (28cm Wider Belt)

SMT-980WK

卧式墨轮印字 薄膜封口机(加宽型)



技术参数/Technology Parameters

型号/Model	SMT-980WK	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-300°C
电机功率/Power Consumption	80W	输送总承载/Conveyor Loading	<10kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	980x580x390mm
封口速度/Sealing Speeds	0-28m/min (米/分)	净重/毛重/N.W&G.W	39.5kg/32.5kg

Continuous Sealer (Protective)

SMT-980WF

卧式墨轮印字 薄膜封口机(防护型)




技术参数/Technology Parameters


型号/Model	SMT-980WF	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-300°C
电机功率/Power Consumption	80W	输送总承载/Conveyor Loading	<10kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	965x430x365mm
封口速度/Sealing Speeds	0-28m/min (米/分)	净重/毛重/N.W&G.W	26kg/29kg

980 Series Panel Operation Instructions


980系列面板说明书

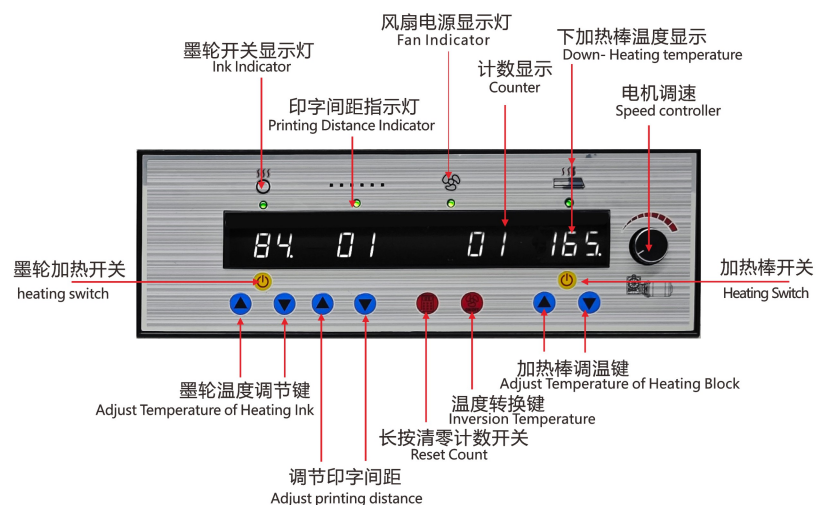


980系列可定制以下功能 Following function can be customized.



①左右双加热系列
Dual heating series



②加宽2CM封口
2CM sealing width is optional



③可更换不同印花轮
Various Embossing patterns are optional



④节能陶瓷加热棒
Saving energy heating are optional
(加热时间提高40%，耐用度提高300%)
Save 40% heating time and increase 300% durability.



⑤可做反手封口机
Left to right direction is optional



励磁纯铜电机+高效涡轮蜗杆减速机
斜齿轮 转动平稳 噪声小 承载力强 啮合性好

EUROPEAN STANDARD CONTINUOUS SEALER 多功能薄膜封口机

Continuous Sealer (Horizontal type)

SF-770I
SF-770IFS(反手型)
卧式薄膜封口机



技术参数/Technology Parameters

型号/Model	SF-770I / SF-770IFS(反手型)	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-300°C
电机功率/Power Consumption	65W	输送总承载/Conveyor Loading	<5kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	860x410x375mm
封口速度/Sealing Speeds	0-16m/min (米/分)	净重/毛重/N.W&G.W	16kg/19kg

Continuous Sealer (Vertical type)

SF-770II
SF-770IIFS(反手型)
立卧薄膜封口机



技术参数/Technology Parameters

型号/Model	SF-770LW / 770LWFS	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-300°C
电机功率/Power Consumption	65W	输送总承载/Conveyor Loading	<5kg
封口电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	860x470x375mm
封口速度/Sealing Speeds	0-16m/min (米/分)	净重/毛重/N.W&G.W	18kg/21kg

CONTINUOUS SEALER 充气封口机

Nitrogen flushing continuous Sealer (Vertical)

FRM-980CD

充氮气型立卧式薄膜封口机



技术参数/Technology Parameters

型号/Model	FRM-980CD	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-300°C
电机功率/Power Consumption	80W	输送总承载/Conveyor Loading	<5kg
电热功率/Heating Power	280Wx2	外包装尺寸/Shipment Dimension	965x430x445mm
封口速度/Sealing Speeds	0-16m/min (米/分)	净重/毛重/N.W&G.W	35.5kg/38.5kg

Air-filling Continuous Sealer (Embossing /Solid ink)

FRM-980CQ

落地式充气薄膜封口机(钢印)

FRM-1020CQ

落地式充气薄膜封口机(墨轮充气)



技术参数/Technology Parameters

型号/Model	FRM-980CQ / FRM-1020CQ	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-300°C
电机功率/Power Consumption	80W	输送总承载/Conveyor Loading	<5kg
气泵功率/Airpump Power	200W	外包装尺寸/Shipment Dimension	1030x590x880mm
电热功率/Heating Power	280Wx2	净重/毛重/N.W&G.W	41kg/48kg
封口速度/Sealing Speeds	0-16m/min (米/分)		

Continuous-Vacuum Sealer with air filling

SMT-1080

多功能连续式真空抽气/充气封口机



技术参数/Technology Parameters

型号/Model	SMT-1080	封口宽度/Sealing Width	10mm
电源电压/Power Supply	AC220/50Hz 110V/60Hz	温控范围/Temperature Range	0-300°C
电机功率/Power Consumption	80W	输送总承载/Conveyor Loading	<10kg
气泵功率/Heating Power	200W	外包装尺寸/Shipment Dimension	1110x510x990mm
封口速度/Sealing Speeds	0-25m/min (米/分)	毛重/G.W	78kg

Big bag Sealer (Vertical)

FRM-1480

大袋多功能立式封口机



技术参数/Technology Parameters

型号/Model	FRM-1480	温控范围/Temperature Range	0-300°C
电源电压/Power Supply	AC220/50Hz 110V/60Hz	输送总承载/Conveyor Loading	<20kg
总功率/Power Consumption	750W	外包装尺寸/Shipment Dimension	1560x680x1460mm
封口速度/Sealing Speeds	0-16m/min (米/分)	毛重/G.W	78kg
封口宽度/Sealing Width	5-10mm	可调高度/Adjustable Height	180-600mm

SMART SEALER SEALER

智能系列封口机

Smart Inkjet Coding Sealer

SMT-280P

智能喷码封口机



型号/Model	SMT-280P	温控范围/Temperature Range	0-300°C
电源电压/Power Supply	220V/50Hz 110V/60Hz	印字类别/Printing Category	喷码
总功率/Power Consumption	1650W	输送总承载/Conveyor Loading	单件 < 15kg
封口速度/Sealing Speeds	0-25m/min (米/分)	外包装尺寸/Shipment Dimension	1290x545x1000mm
封口宽度/Sealing Width	10mm	毛重/G.W	98kg

Smart Vacuum Inkjet Coding Sealer

SMT-280CQ

智能真空喷码封口机



技术参数/Technology Parameters

型号/Model	SMT-280CQ	温控范围/Temperature Range	0-300°C
电源电压/Power Supply	220V/50Hz 110V/60Hz	印字类别/Printing Category	喷码
总功率/Power Consumption	1600W	输送总承载/Conveyor Loading	单件 < 15kg
封口速度/Sealing Speeds	0-25m/min (米/分)	外包装尺寸/Shipment Dimension	1290x545x1000mm
封口宽度/Sealing Width	10mm	毛重/G.W	98kg

Smart Ink Roller Sealer

SMT-280M

智能墨轮封口机



技术参数/Technology Parameters

型号/Model	SMT-280M	温控范围/Temperature Range	0-300°C
电源电压/Power Supply	220V/50Hz 110V/60Hz	印字类别/Printing Category	钢印字
总功率/Power Consumption	1650W	输送总承载/Conveyor Loading	单件 < 15kg
封口速度/Sealing Speeds	0-25m/min (米/分)	外包装尺寸/Shipment Dimension	1290x545x1000mm
封口宽度/Sealing Width	10mm	毛重/G.W	98kg

Smart Steel Seal Sealer

SMT-280

智能钢印封口机



技术参数/Technology Parameters

型号/Model	SMT-280	温控范围/Temperature Range	0-300°C
电源电压/Power Supply	220V/50Hz 110V/60Hz	印字类别/Printing Category	墨轮印字
总功率/Power Consumption	1650W	输送总承载/Conveyor Loading	单件 < 15kg
封口速度/Sealing Speeds	0-25m/min (米/分)	外包装尺寸/Shipment Dimension	1290x545x1000mm
封口宽度/Sealing Width	10mm	毛重/G.W	98kg

六 大优势 /SIX ADVANTAGES



四核 高性能处理器

主频1.5GHZ 运行流畅
Quad-core
High-performance processor
The main frequency is 1.5GHZ,
ensuring smooth operation



喷码封口 瞬印瞬干

美观牢固 同步完成
Coding and sealing
Instant printing and instant drying
Beautiful and firm, completed
synchronously



持续维护优化

可U盘更新
Sustainable Maintenance
Optimization Can Be Updated
Via Usb Flash Drive



5寸IPS 高清触摸屏

高分辨率 180度可视
5-inch IPS
High-definition touch screen
High resolution 180 degree view



喷码内容多样

文字 数字 图案 二维码支持任意语言定制
Diverse coding content Text, numbers,
patterns, QR code Support
customization in any language



智能喷印设置

动态日期 自动计数
Intelligent
Printing Settings
Dynamic Date Auto Count

纯铜材质加热冷却块
Pure Copper Heating And Cooling Block



随心排版
Type as You Like
所见即所得
What you see is what you get

矢量字体
Vector Font

企业LOGO
Company Logo

中英文字
Chinese and English

二维码
QR Code

条形码
Barcode

智能计数
Intelligent Counting


警示标识
Warning Sign

多种语言
Multiple Languages

多色墨盒可选
Multiple Ink Cartridges Available

一键切换语言
One-click language switching

支持任意语言定制
Support customization in any language



适用范围广

Wide Range Of Applications

本机适用于铝箔袋、塑料袋、复合袋、牛皮纸、保鲜袋、茶叶袋、收缩膜等各类热封包装袋的封口作业。封口牢固，效率高。广泛应用于食品、医药、化工、农业、润滑油等行业。

This machine is suitable for sealing various types of heat-seal packaging bags, including aluminum foil bags, plastic bags, composite bags, kraft paper, freshness bags, tea bags, and shrink film. It offers secure sealing and high efficiency, making it widely used in industries such as food, medicine, chemical, agriculture, and lubricating oil.



PE透明袋



风琴袋



铝箔袋涂层袋



牛皮袋



静电袋



阴阳袋

SMT-320ZW 智能紫外激光打码封口机 Smart UV Laser Coding Sealing Sealer




侧面展示图



技术参数/Technology Parameters

型号/Model	SMT-320ZW	温控范围/Temperature Range	0-300℃
电源电压/Power Supply	220V/50Hz 110V/60Hz	印字类别/Printing Category	激光喷码
总功率/Power Consumption	2700W	输送载荷/Conveyor Loading	单件 < 15kg
封口速度/Sealing Speeds	0-25m/min (米/分)	外包装尺寸/Shipment Dimension	1290x875x1065mm
封口宽度/Sealing Width	10mm	毛重/G.W	147kg

SMT-320JG 智能激光打码封口机 Smart Laser Coding Sealing Sealer

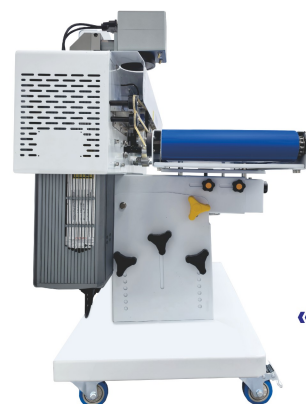

侧面展示图



技术参数/Technology Parameters

型号/Model	SMT-320JG	温控范围/Temperature Range	0-300℃
电源电压/Power Supply	220V/50Hz 110V/60Hz	印字类别/Printing Category	激光喷码
总功率/Power Consumption	2200W	输送载荷/Conveyor Loading	单件 < 15kg
封口速度/Sealing Speeds	0-25m/min (米/分)	外包装尺寸/Shipment Dimension	1290x620x1026mm
封口宽度/Sealing Width	10mm	毛重/G.W	126kg

自动计数 /Automatic Counting

省去工厂盘点工序	Eliminate the Factory Inventory Process
降低成本	Reduce Costs
高速封口	High Speed Sealing
自动统计数量	Automatically count the quantity

24H工作更稳定 24H work is more stable

无需更换墨水	No need to change ink
全自动对焦	Fully automatic focusing
高速打码效果稳定	High-speed coding effect is stable

无需耗材 No consumables required

热能打码 仅需电力	Thermal marking, powered by electricity
0成本打码 海量封装打码	0 cost coding Massive packaging
自动对焦 / 110MM大尺寸	Coding Autofocus / 110MM large size

智能打码系统 Intelligent coding system

7寸智能触控屏	7-inch intelligent touch screen
多种内容样式	Multiple content styles
灵活编辑	Flexible editing
一键切入打码内容	One-click access to captcha solving content

大尺寸打码



多种打码样式

示数文字	图形	2025/10/01 2099/10/01	日期	NO-A001 NO-A002 NO-A003	变量信息
文本	可变图形	0123456789 0123456789 in China	点阵字	空心里	加粗字
多种条码	可变图形	0123456789 0123456789 in China	点阵字	空心里	加粗字

光纤激光器 Fiber Laser

打码: 有色类包装袋



二氧化碳激光器 Carbon Dioxide Laser

打码: 用透光/有色/透明包装袋




紫外激光器 UV laser

打码: 有色包装袋、铝箔袋、纸袋等



四种封口印花效果可选

Four sealing and printing effects are available



自动计数
Automatic Counting



24H工作更稳定
24H work is more stable



无需耗材
No consumables required




智能打码系统
Intelligent coding system

KUNBA U7 SERIES FULLY AUTOMATIC HIGH-SPEED ASSEMBLY LINE INKJET PRINTER

捆霸U7系列/ KUNBA U7 Series

全自动高速流水线喷码机 Fully Automatic High-speed Assembly Line Inkjet Sealer



产品优势 /Product advantages

1. 高速喷码: 200米/分钟;
High-speed coding: 200 meters per minute;
2. 全新UI, 自研基于Linux 系统便捷编辑;
Brand new UI, self-developed, based on the Linux system for convenient editing;
3. 可用干性、水性、油性墨水;
Compatible with dry, water-based, and oil-based ink cartridges;
4. 苹果蓝牙耳机同款PC 高抗材质;
Apple Bluetooth headset same model PC high-resistance material;
5. 自带11种条码自动生成;
Equipped with automatic generation of 11 types of barcodes;
6. 文字可下划线、描边空心字、倾斜、加粗、划除;
The text can be underlined, stroked hollow, inclined, bold, and crossed out;
7. 可实现远程通讯功能;
It can achieve remote communication function;
8. 大尺寸7寸触控屏灵敏丝滑;
Large 7-inch touch screen is sensitive and smooth;
9. 可拓展语言、加载新字体, 可手写输入。
Extensible language, loading new fonts, and handwriting input.

技术参数 /Technology Parameters

型号/Model	U7喷码机	操作语言/Operating Language	中文、英文、可拓展
机身材质/Fuselage Materia	PC	产品尺寸/Product Dimensions	152*223*32mm
屏幕尺寸/Screen Size	7寸触控屏/7-inch touch screen	毛重/G.W	3.48Kg
使用环境/Usage Environment	0-40°C / 10-80%	外包装尺寸/Shipment Dimension	440*240*135mm
外置接口/External Interfaces	网口、USB、DB9数据、DC电源、DB15喷头/Network port, USB, DB9 data, DC power supply, DB15 nozzle		

应用范围 /Application Scope


针对平面喷码, 对于喷码材质没有限制, 可应用于食品、饮料、医药、礼盒包装、五金件、电子元件、包装袋、纸盒卡片等产品的多样化喷码。可喷码: 日期、图形、可变一维码、二维码、医疗码、变量数字/数值等。

For flat surface coding, there are no restrictions on the coding material. It can be applied to a wide range of products such as food, beverages, pharmaceuticals, gift boxes, hardware, electronic components, packaging bags, and paper cards. The coding can include date, graphics, variable 1D barcodes, QR codes, medical codes, and variable numbers/values.

应用场景示意 / Application

集成包含 / Integration Includes

- | | |
|-------------|---|
| SMT正手封口机X4台 | SMT Band sealer (from right to left) X4 |
| SMT反手封口机X4台 | SMT Band sealer (from left to right) X4 |
| 皮带输送线X1条 | Belt Conveyor X1 |
| 金属检测设备X1台 | Metal detection equipment X1 |
| 整理圆盘X1台 | Sorting disc X1 |

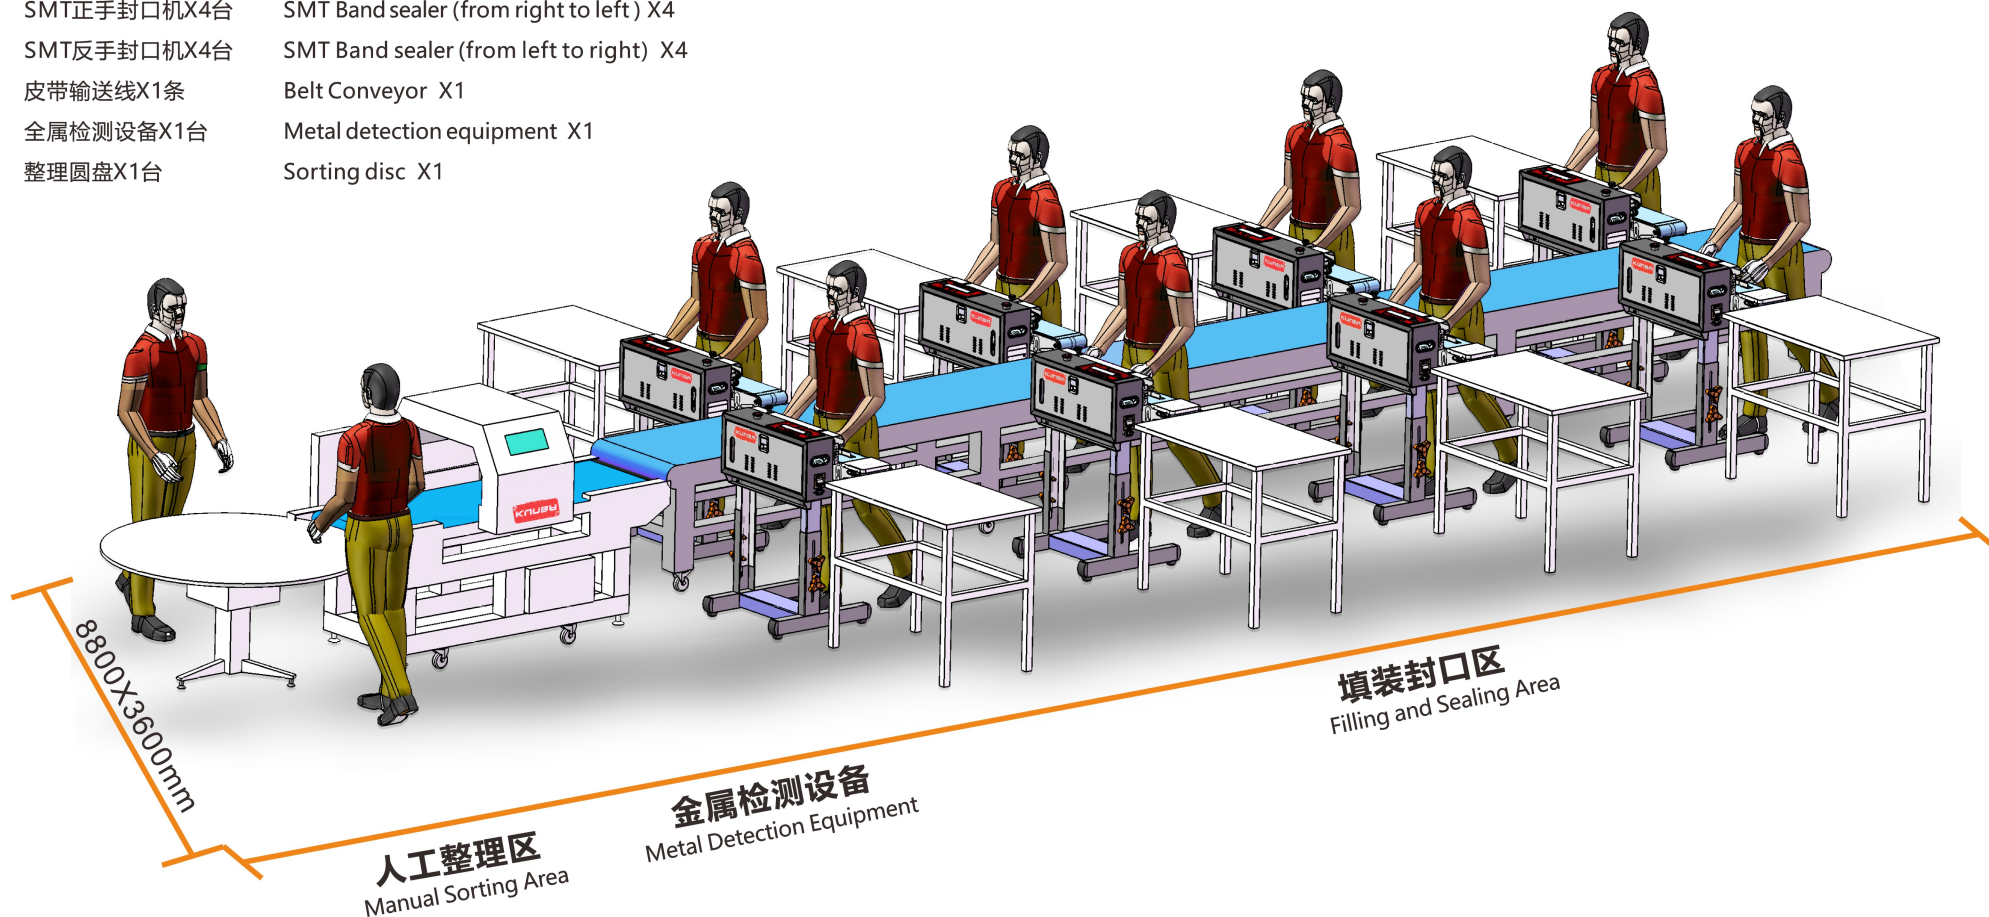

建议面积 $\geq 33 \text{ M}^2$
Proposed Area

Manual Sealer/Pedal Sealer 手压/脚踏封口机



手压封口机（塑壳、铝壳）
Manual Sealer(plastic, aluminum)

PFS100-400

技术参数/Technology Parameters

型号/Model	PFS100	PFS200	PFS300	PFS400
电源电压/Power Supply	AC110-220V/60-50Hz	AC110-220V/60-50Hz	AC110-220V/60-50Hz	AC110-220V/60-50Hz
总功率/Power Consumption	250W	300W	450W	600W
最大封口尺寸/Max Sealing Size	150mm	200mm	300mm	400mm
外包装尺寸/Shipment Dimension	72X220X110mm	80X320X150mm	80X450X180mm	85X550X180mm
毛重/Gross Weight	1.9kg	3.0kg	4.5kg	5.5kg

脚踏封口机（落地式）
Pedal Sealer (ground)

PFS350-800JT

技术参数/Technology Parameters

型号/Model	PFS350JT	PFS450JT	PFS600JT	PFS800JT
电源电压/Power Supply	AC110-220V/60-50Hz	AC110-220V/60-50Hz	AC110-220V/60-50Hz	AC110-220V/60-50Hz
总功率/Power Consumption	1200W	1250W	1500W	1800W
最大封口尺寸/Max Sealing Size	350mm	450mm	600mm	800mm
外包装尺寸/Shipment Dimension	880X550X250mm	880X550X250mm	880X550X250mm	920X550X250mm
毛重/Gross Weight	19kg	21kg	24.5kg	26kg

脚踏封口机（带打码）
Pedal Sealer (with Printer)

PFS350-800JT

技术参数/Technology Parameters

型号/Model	PFS350JT	PFS450JT	PFS600JT	PFS800JT
电源电压/Power Supply	AC110-220V/60-50Hz	AC110-220V/60-50Hz	AC110-220V/60-50Hz	AC110-220V/60-50Hz
总功率/Power Consumption	1500W	1700W	1900W	2100W
最大封口尺寸/Max Sealing Size	350mm	450mm	600mm	800mm
外包装尺寸/Shipment Dimension	880X550X250mm	880X550X250mm	880X550X250mm	920X550X250mm
毛重/Gross Weight	21kg	23kg	27kg	28kg

RIBBON PRINTER HP系列色带打码机

捆霸牌系列打码机广泛适用于食品、医药等行业，具有印刷精美，字迹牢固，无污染，换字方便等优点，能完美印刷各种包装材料，如：PT、PE、OPP、铝箔、纸等。

- Special design economize ribbons
- Stable footing
- Clear printing
- No hazard
- 3 lines of letter an number

手压色带打码机（电脑版）
Manual ribbon printer(Digital version)

HP-241S



技术参数/Technology Parameters

型号/Model	HP-241S
电源电压/Power Supply	AC110-220V/60-50Hz
总功率/Power Consumption	100W
印字行数/Printing Lines	1-3行 (line)
速度/Printing Speed	20-120pcs/min
外包装尺寸/Shipment Dimension	240x240x140mm
净重/毛重/N.W&G.W	5.0KG/5.6KG

电动色带打码机（电脑版）
Electrical ribbon printer(Digital version)

HP-23S



技术参数/Technology Parameters

型号/Model	HP-23S
电源电压/Power Supply	AC110-220V/60-50Hz
总功率/Power Consumption	120W
印字行数/Printing Lines	1-3行 (line)
速度/Printing Speed	20-120pcs/min
外包装尺寸/Shipment Dimension	295x285x350mm
净重/毛重/N.W&G.W	8.5kg/9.3kg